

Field Demonstration of Surface Human-Robotic Exploration Activity

Liam Pedersen¹, William J. Clancey^{2,3}, Maarten Sierhuis¹, Nicola Muscettola², David E. Smith², David Lees¹, Kanna Rajan², Sailesh Ramakrishnan¹, Paul Tompkins¹, Alonso Vera², Tom Dayton¹

¹QSS Group, Inc; NASA Ames Research Center

²NASA Ames Research Center, Moffett Field, CA

³Florida Institute for Human & Machine Cognition, Pensacola, FL

NASA Ames Research Center, MS 269-3, Moffett Field, CA 94035-1000

{pedersen, msierhuis, mus, lees, sailesh, pauldt, de2smith, kanna, tdayton}@email.arc.nasa.gov

{william.j.clancey, alonso.vera}@nasa.gov

Abstract

We demonstrated integrated technology for multiple crew and robots to work together in a planetary surface exploration scenario. Highlights include dynamic replanning, “many to many” rover commanding, efficient human-system interaction and workflows, single cycle instrument placement, and data management.

Introduction

To support the Vision for Space Exploration, NASA’s Collaborative Decision Systems (CDS) 2005 program sought to:

Develop and demonstrate information technology for self-reliant operation and multi-agent teaming, enabling human and robotic individuals and teams to operate exploration missions in harsh dynamic environments in a sustainable, safe, and affordable manner

A plausible surface extravehicular activity (EVA) scenario (Figure 1) envisages capable robots operating alongside astronauts, relieving them of certain tasks and responding to their requests, to explore a location.

Such robots must respond in a timely manner to requests from multiple crew members in different circumstances. Each of these groups is subject to different operating constraints (e.g., signal time delay, user interface devices) and situational awareness.

Reducing the crew workload is a primary concern, particularly during EVA. Autonomy allows robots to complete certain tasks with little crew attention. However, purely autonomous systems are poor at modeling the richness of interactions and trade-offs between the various crew members and their goal requests. Thus, operators must interact with the robot at various levels of abstraction – from high level goal commands, to detailed activity sequences, to direct teleoperation—to cope with the full spectrum of situations expected.



Figure 1. Human-robotic EVA scenario, with suited astronauts supported by robotic assistants, habitat-based personnel, and Earth-based mission operations team.

As we anticipate requirements for Mars, the system configuration is complicated by the inability to have people on Earth continuously monitoring and controlling what the astronauts and robots are doing. Thus, just as we want to automate aspects of astronaut work, we need to automate the kind of mission control oversight provided during Apollo [Clancey, 2004-1, 2].

The CDS Demonstration (NASA Ames Research Center, September 2005) showcased the integration of diverse technologies to investigate these issues (Figure 2). Specifically, we brought together the Multi-Target Single Cycle Instrument Placement technologies [Pedersen et al., 2005-1, 2] with the Mobile Agents Architecture framework [Sierhuis et al., 2005] for a suited astronaut to work with a highly autonomous Mars Exploration Rover (MER) class planetary exploration rover (K9) and a less autonomous but faster EVA assistant robot (Gromit) to explore an area, supported by additional personnel in a nearby habitat to control the rovers and oversee the EVA.



Figure 2. NASA ARC Human-robotic demonstration scenario, with single astronaut commanding two distinct rovers (K9, a highly autonomous MER class rover, and Gromit, a rapid robotic assistant) supported by habitat-based personnel.

Numerous factors drove the design of the simplified system we configured for our demonstration. The planner-robot-agent system must accept requests from multiple crew members and provide a mechanism for resolving conflicts between them. A single robot operator (by assumption, a crew member who remains inside the habitat) must be able to oversee the system and provide input where necessary, but should be involved in the EVA only when a request directed at a robot cannot be handled autonomously. Space-suited crew members must be able to verbally issue and confirm high-level goal requests. All crew member activities and robot requests must be coordinated in a natural and timely manner. Finally, the system must adapt to faults and off-nominal resource (time and energy) consumptions.

We introduce a framework for a system that allows the multiple crew members, both in a habitat and on EVA, to carry out tasks by working together with multiple robots under the control of a single centralized planner program and overseen by a single operator. The system is designed for tasks that can be decomposed into loosely coupled sub-tasks that each person and robot can execute. By using a distributed multiagent architecture, people, robots, tools, and instruments, interfaces can be integrated into a coherent data and workflow system.

The subsequent sections describe the CDS Demonstration mission scenario, the resulting research issues we have chosen to investigate, an outline of the system architecture, and some of the key technologies.

Mission Scenario

The CDS demonstration mission scenario begins with two rovers, K9 and Gromit, at work. K9 is a highly autonomous MER class exploration rover, tasked with going to multiple rock targets and acquiring close up

microscopic images of each. Gromit meanwhile is getting images of an area as part of a pre-EVA survey. Astronauts exit the hab to commence an EVA, overseen by a crewmember (“habcom”) in the habitat who is also responsible for overseeing the rovers.

As the astronauts do their EVA, an automated system monitors progress, reminding them of their next activities, alerting habcom if anything unusual happens.

At a particular location, an astronaut discovers a rock worthy of further investigation. After recording a voice note and taking pictures, the astronaut verbally requests assistance from Gromit, interrupting its activities and commanding it to go to the astronaut to take a picture of the astronaut pointing at the rock. The astronaut asks from K9 a microscopic image of the rock prior to the scheduled end of the EVA. Whilst Gromit executes that command and the astronaut resumes other activities, K9’s mission planner software determines if the request of K9 can be accommodated without compromising earlier requests, and if not, it asks the rover operator (habcom) for approval.

The request is passed on to K9, which gets the requested microscopic image, incorporating it into a geographic information system accessible to the crew and the remote science team, who have sufficient time to peruse it prior to EVA end, and to request that the astronaut take a sample of the rock on her way back to the hab.

The actual demonstration was slightly simplified, with one astronaut, distinct rover operators and habcom, and involvement of the rover operator *every* time new goals were requested of K9.

Research Issues

Research issues in this project include dynamic re-planning and repairing of plans in response to new task requests or

faults, efficient human-systems interaction and workflows, and visual target tracking for sensor placement on objects subject to extended occlusions. (Note that EVA issues relating to interaction between astronauts, such as preventing robots or agents from unnecessarily interrupting human activities, are eliminated in this demonstration by having only one astronaut.)

Flexible Robot Command Cycles

The rovers need to amend their activity plans at any time in response to new task requests from the crew, insufficient resources, or activity failures. The goal is the continuous adjustment of a long term rover operations plan (possibly spanning days, weeks or months) as new circumstances and goal requests materialize.

This is in stark contrast to the MER vehicles, which start each sol with a completely fresh activity plan that is deliberately conservative to avoid resource limitations, and contains only limited recovery options if the rover is unable to complete an activity.

Overcoming those MER limitations requires re-planning on the fly, incorporating the robot's current execution state with the new and remaining goals.

Also, the system must tolerate signal delays, as new goal requests or other information can come from Earth.

"Many to Many" Robot Commanding

Task requests can come from many sources (EVA astronauts, intravehicular activity—IVA—astronauts, ground based operators) and must be dispatched to the appropriate robot, taking into account both the robot capabilities and the user interface (UI) at the task requestor's disposal (for example, a suited astronaut can use speech but not a sophisticated graphical user interface—GUI).

Ultimately, a single rover operator should be responsible for all robots, even though task requests may come from other crew members. Autonomy and careful workflow design are needed for this person to oversee many robots concurrently, with the goal being that operator attention will be required only to handle complex or off nominal situations, and to resolve task conflicts not adequately modeled by robot plans.

Real Time EVA Crew Monitoring and Advising

From studying the transcripts and videos of the Apollo EVAs, we draw two important lessons. Firstly, the astronauts on the Moon, though sometimes working as a team, primarily had independent work assignments strictly planned and trained for, before the mission. The capsule

communicator (CapCom¹) coordinates the work, serving as a virtual team-member and assistant to the astronauts. For example, instead of asking each other, the astronauts asked CapCom where they could find their tools on the lunar rover. It is the CapCom who acted as their personal navigator [Clancey et al., in preparation].

Secondly, the CapCom is responsible for continuously monitoring EVA progress, time spent at worksites, activities to be done by the astronauts; and coordinating the discussions between crew and mission control.

Future missions with long latency communications links to Earth will require automation of CapCom tasks. In this situation the role of CapCom will fall to a crewmember ("HabCom") in the habitat. Because crew time is valuable, it is imperative to automate some of the mundane CapCom tasks, such as monitoring the astronaut locations and duration of EVA activities, with alerts to indicate threshold violations, advising about the EVA plan, multiple astronaut tasks, and astronaut health.

Autonomous Instrument and Tool Placement

Because of bandwidth and power limitations, signal latency, strict flight rules, and other factors, the MER vehicles currently on Mars require up to three full sol command cycles to approach a distant target and accurately place an instrument against it. One cycle is required to drive the rover to the vicinity of the target, another for a correction maneuver to bring the target within reach, and a final uplink to command the placement of the rover manipulator on the target feature itself.

Our goal is to autonomously approach and place an instrument on multiple features of scientific interest up to 10 m distant with 1 cm precision in a single command sequence uplink. This is inspired by early design requirements for the 2009 Mars Science Laboratory rover, but goes beyond it in the pursuit of multiple targets per command cycle.

Achieving these goals requires broad advances in robotics, autonomy, and human-system interaction methods:

- Precision navigation to multiple points in the worksite, whilst avoiding obstacles and keeping targets in view. This requires visual target tracking. Note that GPS technology is not precise enough for this task.
- Automated instrument placement, using the rover arm to safely put the requested sensor onto the target.
- Mission and path planning, taking into account the constraints imposed by target acquisition and tracking, rover resources, and likely failure points.
- Immersive photo-realistic virtual reality interface for goal specification, plan analysis, and data product review.

¹ The name derives from early space flight, when Mercury was called a capsule rather than a spacecraft.

The details of single cycle multi-target autonomous instrument placement are described in [Pedersen, 2005-1, 2] and are not described further here.

Voice-Commanded Device Control

Astronauts need to control many devices while on an EVA, such as cameras, tools, and robots. Controlling these devices via complex GUIs while wearing spacesuit gloves is physically and mentally difficult. Controlling such devices with voice commands through an agent-based intermediary provides an intention-based interface, which helps coordinate data, instruments, and human activities.

Data Management and Display

Astronauts and rovers will acquire significant amounts of data that must be routed, stored, and catalogued automatically in real time. Experience with past NASA missions suggests that finding and accessing work process, science, and other telemetry data throughout a mission often is not easy. Even on Earth, post hoc interpretation of field notes is difficult. In a space suit, taking notes is doubly difficult.

Astronauts need to dynamically name locations, and associate them with data products (including recorded voice notes) and samples collected at those locations. Additional rover data products also need to be properly catalogued, both so that the remote science team can reconstruct what was discovered in an EVA, and for the rover operator to instruct the rovers to go to specific named features at any location.

Finally, data products need to be displayed in context with overhead imagery, 3D terrain models, rover telemetry, and execution state and mission plans, so human explorers can rapidly identify, specify, and prioritize the many potential targets; evaluate the plan of action; and understand the data returned from the multiple sites that the rover visited.

System Architecture

As Figure 3 shows, each crew member is provided a Personal Agent that relays task requests (e.g., “Inspect rock named Broccoli when able”) to the Rover Agents, which insert them into the Rover Data Repository, monitored by a centralized, off-board Rover Plan Manager. The plan manager coordinates with the rover executive to stop the rover, upload the current execution state, and create activity plans to achieve the new and previous goals.

For new plans to be created without requiring Rover Operator intervention each time, the new plan could be compared with the previous one; the Rover Operator would be interrupted only if plan approval criteria are not met, in which case the operator would manually edit and approve the new plan. If necessary, the operator confers with other crew members to establish the un-modeled priorities and

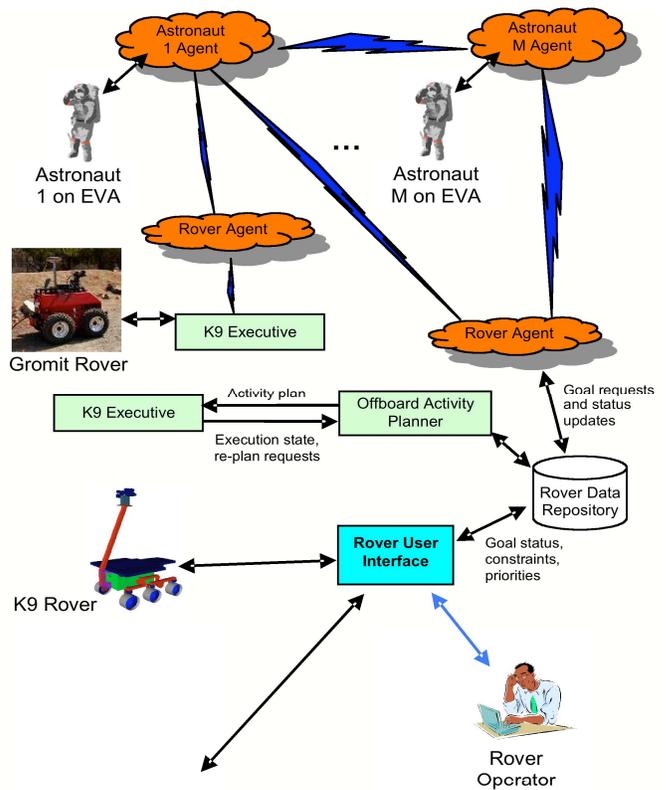


Figure 3. CDS Demonstration system architecture.

constraints. Currently this is not implemented, both because of the complexity of the plan approval process, and the need for the rover operator to manually designate targets for the K9 rover to investigate.

In principle, the off-board planner could control multiple robots. The alternative is the astronaut commanding the rover via a rover agent, allowing the astronaut to issue simple voice commands (“Go to location 2”) that do not require sophisticated planning for of the rover’s actions.

The robotics and autonomy for K9 to navigate to targets and place instruments on them is detailed in [Pedersen, 2005-1, 2]. The following sections detail the agent architecture for routing of astronaut commands, data products and EVA monitoring; the mission planning and plan management system, and rover execution system, and the rover interfaces.

Mobile Agents Architecture

Figure 4 shows the CDS configuration of the Mobile Agent Architecture (MAA) [Clancey et al., 2004]. Each personal or rover agent is a Brahms [Clancey et al., 1998; Sierhuis, 2001; Clancey 2002] virtual machine (an agent execution environment) with a set of communicating agents, a set of assistant agents (Network, Plan, Science Data, etc.), and a set of communication agents to communicate with external systems (Dialog, Network, Email, Science Data Manager, etc). The entire architecture is connected via a wireless

network with an agent location manager and the necessary agent services [Sierhuis et al., 2005].

Voice commanding of devices (e.g., cameras, robots, scientific instruments), software systems, and agents is accomplished in Mobile Agents using an open microphone, speaker-independent approach [Dowding et al., 2006]. Every utterance is matched against more than 100 patterns using a category-based grammar that recognizes astronaut-defined names, time and distance units, and alternative wordings. A combination of methods for coordinating human-system interaction has been developed empirically, including contextual interpretation, explicit confirmation, and status tones.

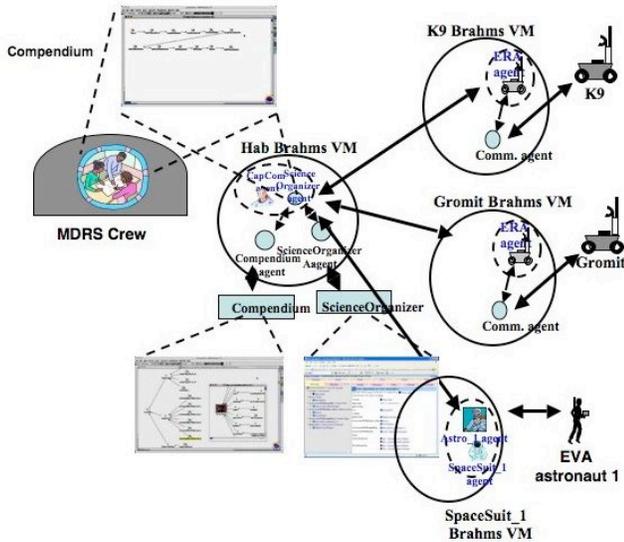


Figure 4 : Mobile Agents configuration for CDS.

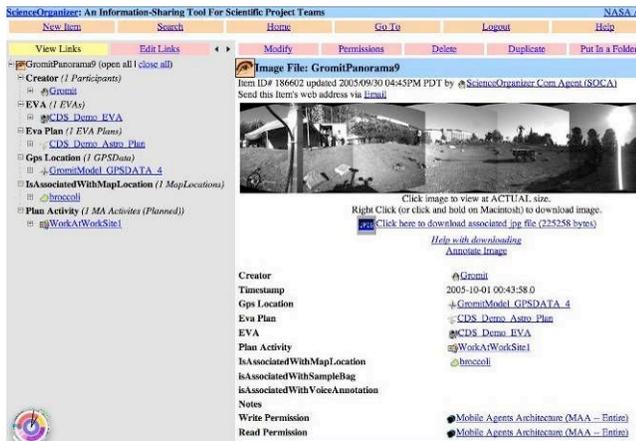


Figure 5: Automatic agent data management using semantic web database [Keller et al., 2004]

Another important role of the Mobile Agents Architecture is to provide data flow and management capability for all aspects of the mission. The current version of the architecture includes agent interfaces to groupware tools for distributed human collaborative mission planning and

data analysis; a semantic web database; data management agents to collect, correlate, store, and forward data; and email clients to forward mission data as they are created to the appropriate people, with hyperlink pointers to the stored data products.

Planning and Plan Management

The planning process for K9 must be capable of handling new or changed task requests, and uncertainty or failures in execution. As a result, the system must continually monitor input from the operator, monitor the state of K9's execution, communicate state and plan information among the components, and initiate replanning when necessary. This overall process is the job of the *Plan Manager*.

The Plan Manager has several components (Figure 6), the principle ones being the state estimator, the path planner (PathGen), and the planner itself.

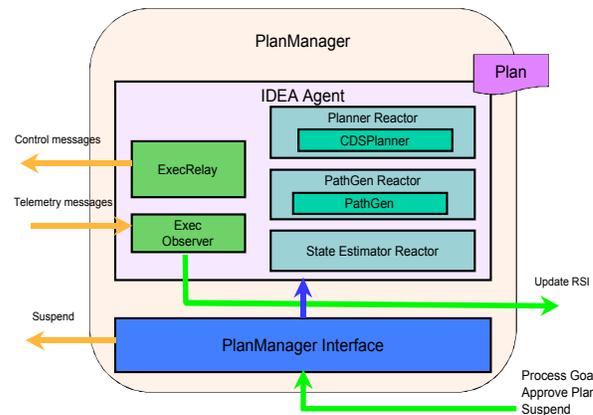


Figure 6 : Architecture of the Plan Manager

If the rover operator (a human) signals that there are new or changed task requests (goals), the Plan Manager sends a command to the executive, suspending execution by the rover. Once execution is suspended, the Plan Manager determines the current state, based on the most recent rover telemetry. Using this state information and the goals provided by the rover operator, PathGen finds a network of possible routes between the current location and the locations of interest. This path network, along with the state and goal information, is then provided to the planner, which generates a revised plan. The path network and plan are then sent back to the rover operator for approval. If the operator approves the plan, the Plan Manager sends it on to the executive, and monitors plan execution.

The Plan Manager is implemented as an *IDEA Agent*. IDEA is described in greater detail below, but essentially, this means that the control flow for the Plan Manager is described as a set of declarative temporal constraints governing the invocation and execution of the various components. A reasoning engine then runs on these constraints and determines which component is to be run next, given the current state of the Executive, Plan Manager, and operator interface (RSI). For example, unless

additional changes have been made to the goals, planning is run after path generation because there is a constraint indicating that a planning activity will follow a path generation activity in these circumstances. Implementing the Plan Manager in this way has allowed us considerable flexibility to explore different control flows, and to update the system as new capabilities and modules are developed.

The planning engine used in the plan manager is a constraint-based planner (Frank & Jonsson, 2003) built on top of the Europa constraint management system (Jonsson et al., 2000). Often, it is impossible to achieve all of the goals provided to the planner, given the time and energy available to the rover; the planning problem is an *oversubscription* problem (Smith, 2004). To determine which subset of the goals to achieve, and in which order, the planner solves an abstract version of the problem in the form of an *orienting* problem, a variant of the traveling salesman problem. A graph is constructed and labeled using the path network, current rover location, goal locations and values, and expected energy and time required for traversing the different paths. A solution of the resulting orienting problem gives the optimal subset and ordering of the goals. This information is used by the planner to construct the detailed action plan. Details of this technique can be found in (Smith, 2004).

Model-Based Execution

The executives used on both the K9 and Gromit rovers are built using the Intelligent Distributed Execution Architecture (IDEA). IDEA is a multi-agent, real-time architecture that exploits artificial intelligence planning as the core reasoning engine of an autonomous agent (Fig. 7).

An IDEA agent typically receives messages from other agents, reasons about those messages, and reacts by sending out messages to other agents or by executing actions on hardware it controls. At the heart of an IDEA agent is a declarative model describing the knowledge of the agent and the mechanisms it uses to communicate with other agents, as well as the controlled hardware systems. The agent uses this model and a reactive planner to elaborate its plans and execute actions/send messages within the latency of a reaction cycle. Through this process the IDEA agent guarantees a response within a fixed

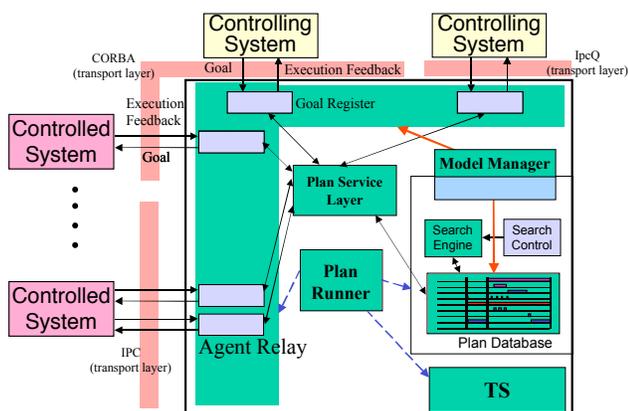


Figure 6. Architecture of an IDEA agent.

latency period.

The K9 Executive receives a plan from the plan manager and then constructs a set of timelines to represent the plan. It also periodically monitors the robot to measure the status of its batteries and its position. Once the plan is loaded, the executive uses its reactive planner to determine which plan steps must be executed now. It then causes those steps to be done, by sending appropriate commands to the base controller of the robot for immediate execution. The Exec agent then monitors the robot for a response indicating whether any of these commands failed, and publishes this status to the Plan Manager. In case of failures, the K9 Exec does appropriate reasoning based on its deliberative model, to generate a sequence of actions to put the robot in a safe state and request that the Plan Manager generate a revised plan.

The Gromit Executive has capabilities similar to the K9 Executive's, but also has a deliberative planner. The Gromit Executive gets high level goals from the Mobile Agents system as specified by the astronaut, and both the reactive and deliberative planners act on them. At first, the deliberative planner has more of an opportunity to flesh out the plan based on the common declarative model. Once the plan includes steps that must be executed now, the reactive planner takes over to execute those steps and mark them as in-progress or completed. In this manner, planning and execution are interleaved, allowing Gromit to react to its current execution status and perform adequate repair. It also allows Gromit to suspend its current plan, be teleoperated by the astronaut, and then resume its earlier plan from its new state.

Rover User Interface and Data Repository

The Rover User Interface (UI) and the Rover Data Repository / Rover System Interface (RDR/RSI) form the interface between the rover and planner and their human operator. The UI consists of two complementary user-facing applications (Viz and PlanView) and one supporting application, the Stereo Pipeline, which reconstructs 3-D terrain data from stereo image pairs.

Viz (Figure 8) [Stoker, et al., 1999] is an immersive 3-D graphics application which displays the terrain patches

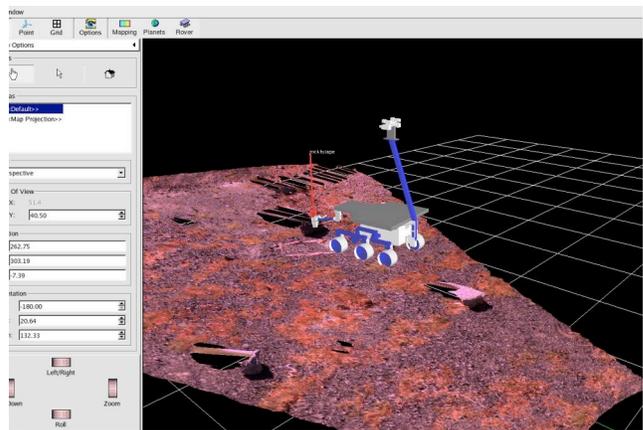


Figure 7. Viz.

generated by the Stereo Pipeline and allows the rover operator to quickly get a sense of the rover's surroundings, make quantitative measurements, and plan rover operations. Viz includes a rover simulation (Virtual Robot), which gives the operator feedback about the rover's interaction with its surroundings, particularly for operations in tight quarters.

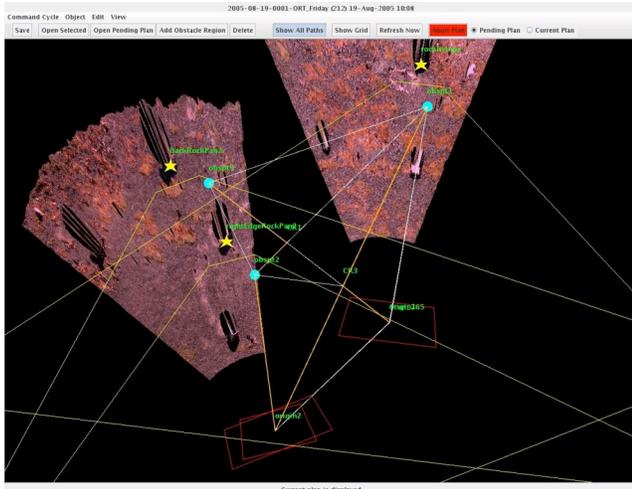


Figure 8. *PlanView.*

PlanView (Figure 9) is a supporting application optimized for displaying overhead views of terrain models from Viz and overlaying them with planner information, including rover drive paths, selected targets, and target utility.

The RDR and RSI comprise a database and its associated support application that collect and organize the data from the planner and the rover and provide it to operators and scientists for reporting and analysis.

The work of creating a plan is allocated among humans and computers according to the specific strengths of each, in a carefully coordinated work flow that iterates to a satisfactory plan.

Plan Visualizing and Editing

The process of activity planning and re-planning, conducted by an astronaut in the Habitat in the current scenario, needs to be fast and error-free. This requires tools that support efficient direct manipulation of plan components as well as the capability to compare and evaluate multiple plans at once. The latter capability was supported by a tool called SPIFe (Science Planning Interface) [McCurdy et al.]. An earlier version of SPIFe is being used on the MER rover missions on Mars right now. It will also be used on the next two landed Mars missions (Phoenix 2007 and Mars Science Laboratory 2009) to support activity planning by mission scientists and engineers. SPIFe is a constraint-based system. Scientific intent is entered as constraints on activities (e.g., Image A must be taken between 11:50 - 12:10 LST). The constraints are propagated and then fed to a scheduler called Europa [Bedrax-Weis et al., 2003]. Importantly, SPIFe has been

designed not for automated planning, but for intelligently supporting a human manipulating a plan. For the CDS Demo described in this paper, SPIFe was used to visualize and support the comparison of plans. Before submitting a new (re-)plan to the K-9 Rover, it as was inspected and approved in SPIFe. This version of SPIFe was therefore designed to support easy assessment of changes, both small and large, to a multi-activity plan.

Conclusions

On the topic of human-robot coordination, we have focused on pragmatic ways of combining autonomy with human activities and capabilities. One perspective is that there will always be a combination of automated and human-controlled operations, through interfaces for local astronauts in the habitat or remote mission support teams. Thus, one should not focus on the particular aspects that we have automated or require operator intervention. Rather, our point is to define a simple example of such a combination and how it might be implemented using a variety of planning, voice-commanding, and visualizing systems.

Our work includes historical studies of Apollo EVAs (identifying functions of CapCom in coordinating EVAs), baseline studies of field science (characterizing the nature of collaborative exploration), engineering integration demonstrations (establishing connectivity between software and hardware systems), and experimentation with prototype systems (determining requirements in authentic work settings). The CDS demo was an engineering integration. The next step is prototype experimentation at a field location such as the Mars Desert Research Station in Utah.

References

- [Clancey et al., 1998] Clancey, W. J., Sachs, P., Sierhuis, M., and van Hoof, R. Brahms: Simulating practice for work systems design. *Int. J. Human-Computer Studies*, 49, 831-865.
- [Clancey 2002] Clancey, W. J. Simulating activities: Relating motives, deliberation, and attentive coordination. *Cognitive Systems Research*, 3(3) 471-499, September 2002, special issue on situated and embodied cognition.
- [Clancey 2004-1] Clancey, W. J. Roles for agent assistants in field science: Understanding personal projects and collaboration. *IEEE Transactions on Systems, Man and Cybernetics*, Part C: Applications and Reviews, Special Issue on Human-Robot Interaction, May, 34(2) 125-137.
- [Clancey 2004-2] Clancey, W. J. Automating CapCom: Pragmatic operations and technology research for human exploration of Mars. In C. Cockell (ed.) *Martian Expedition Planning*, AAS Science and Technology Series, Vol. 107, pp. 411-430.

[Clancey et al., 2004] Clancey, W. J., Sierhuis, M., Alena, R., Crowford, S., Dowding, J., Graham, J., Kaskiris, C., Tyree, K. S., & Hoof, R. v. (2004). The Mobile Agents integrated field test: Mars Dessert Research Station 2003. *FLAIRS 2004*, Miami Beach, Florida.

[Clancey et al., 2005] Clancey, W. J., Sierhuis, M., Alena, R., Berrios, D., Dowding, J., Graham, J.S., Tyree, K.S., Hirsh, R.L., Garry, W.B., Semple, A., Buckingham Shum, S.J., Shadbolt, N. and Rupert, S. 2005. Automating CapCom using Mobile Agents and robotic assistants. *AIAA 1st Space Exploration Conference*, 31 Jan-1 Feb, Orlando, FL.

[Clancey et al., in preparation] Clancey, W. J., Lee, P., Cockell, C. S., and Shafto, M. To the north coast of Devon: Navigational turn-taking in exploring unfamiliar terrain. In J. Clarke, *Mars Analogue Research*, AAS Science and Technology Series.

[Dowding, et al., 2006] Dowding, J., Clark, K., and Hieronymus, J. (in preparation). A dialogue system for mixed human-human/human-robot interactions. *Human-Robotic Interaction 2006*, Salt Lake City, March.

[Frank & Jónsson, 2003] Frank, J. and Jónsson, A. Constraint-based attribute and interval planning. *Constraints* 8(4).

[Jónsson 2000] Jónsson, A., Morris, P., Muscettola, N., Rajan, K. and Smith, B. 2000. Planning in interplanetary space: theory and practice. *Proc. 5th Int. Conf. on AI Planning and Scheduling*, pp. 177–186.

[Keller et al., 2004] Keller, R. M., Berrios, D. C., Carvalho, R. E., Hall, D. R., Rich, S. J., Sturken, I. B., Swanson, K. J., & Wolfe, S. R. SemanticOrganizer: A customizable semantic repository for distributed NASA project teams. *ISWC2004, Third Intl. Semantic Web Conference*, Hiroshima, Japan.

[Pedersen et al., 2005-1] Pedersen, L., M. Deans, D. Lees, S. Rajagopalan, R. Sargent, D.E. Smith. Multiple target single cycle instrument placement, *iSAIRAS 2005*, Munich, Germany, September 2005.

[Pedersen et al., 2005-2] Pedersen, L., D.E. Smith, M. Deans, R. Sargent, C. Kunz, D. Lees, S. Rajagopalan, Mission planning and target tracking for autonomous instrument placement. *IEEE Aerospace 2005*, Big Sky, Montana, USA, March.

[Sierhuis, 2001] Sierhuis, M. Modeling and simulating work practice. Ph.D. thesis, Social Science and Informatics (SWI), University of Amsterdam, The Netherlands, ISBN 90-6464-849-2.

[Sierhuis et al., 2005] Sierhuis, M., Clancey, W. J., Alena, R. L., Berrios, D., Shum, S. B., Dowding, J., Graham, J., Hoof, R. v., Kaskiris, C., Rupert, S., & Tyree, K. S. NASA's Mobile Agents architecture: A multi-agent workflow and communication system for planetary exploration. *i-SAIRAS 2005*, München, Germany.

[Smith 2004] Smith, D. Choosing objectives in over-subscription planning. *Proc. 14th Intl. Conf. on Automated Planning & Scheduling*.

[Stoker et al., 1999] Stoker, C., E. Zbinden, T. Blackmon, B. Kanefsky, J. Hagen, C. Neveu, D. Rasmussen, K. Schwehr, M. Sims. Analyzing Pathfinder data using virtual reality and super-resolved imaging. *Journal of Geophysical Research*, 104(E4) 8889-8906, April 25.